

Betriebsanleitung
 Operating Instructions
 Instructions de service
 Istruzioni d'uso
 Handleiding
 Instrucciones para el manejo
 Manual de instruções
 Naudojimosi instrukcija
 Kasutusjuhend
 Lietošanas instrukcija
 Οδηγίες χρήσης
 取扱説明書
 사용설명서

Driftsinstruks
 Driftsinstruktioner
 Käyttöohje
 Driftsvejledning
 Instrukcja obsługi
 Kezelési útmutató
 Návod k obsluze
 Navodilo za uporabo
 Návod na obsluhu
 El Kitabi
 Инструкция по эксплуатации
 使用说明书




VTLF 400
VTLF 500



98/37 EG
 73/23 EWG










DIN EN ISO 14001:2005


DIN EN ISO 9001
001929 QM

 	 		 MAX. VACUUM	 mbar
 AIR	 	 	 MAX. V	 m³/h DIN EN ISO 2151 DIN EN ISO 3744 L_{pA} = 79-81 dB(A) - 50Hz L_{pA} = 80-83 dB(A) - 60Hz K_{pA} = 3 dB(A)

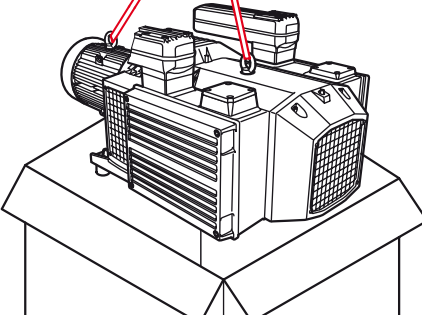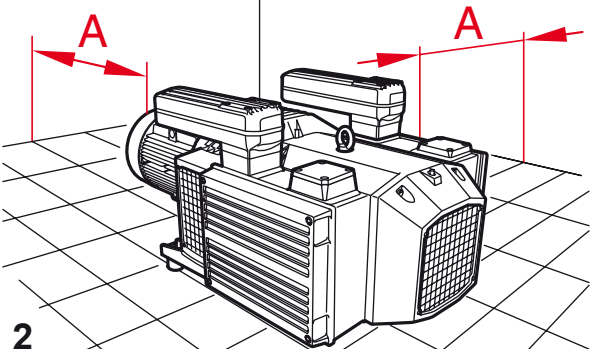
 495 - 500 kg 1091 - 1102 lbs	  1		A > 400mm A > 16"	 > 5°C/41°F < 45°C/113°F	 max. 90%	 max. 800m  2
---	---	--	---	---	---	---

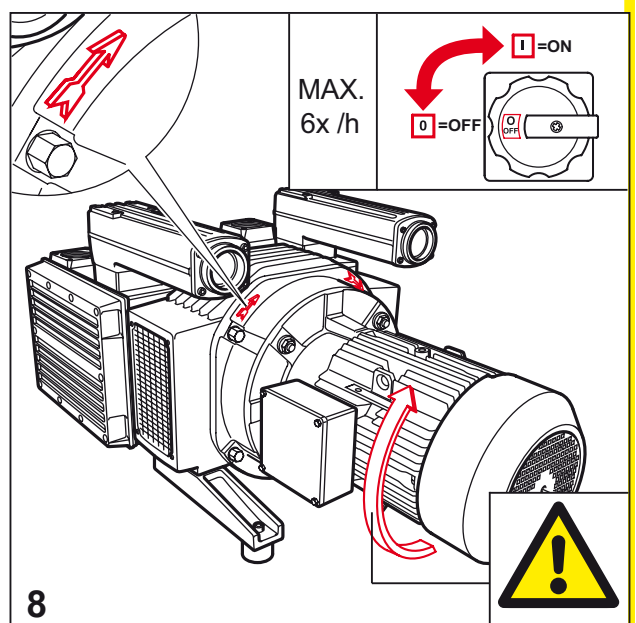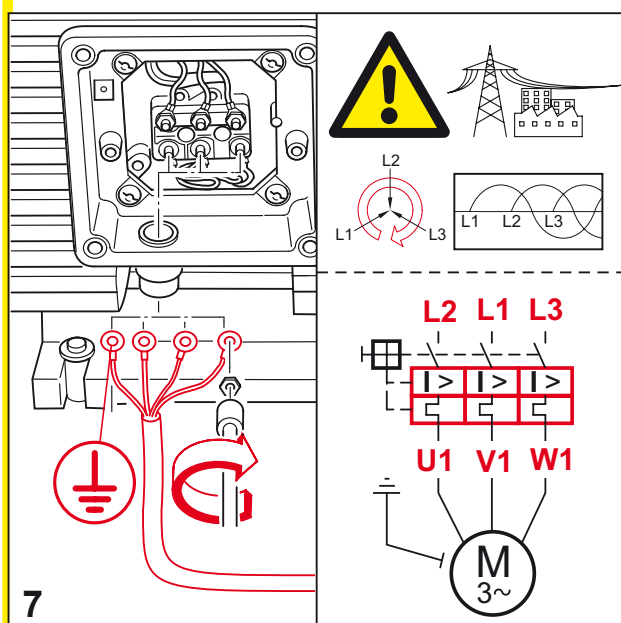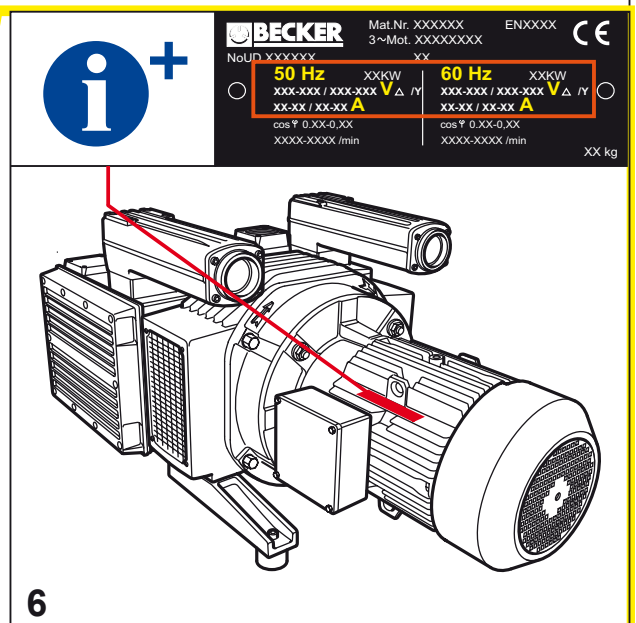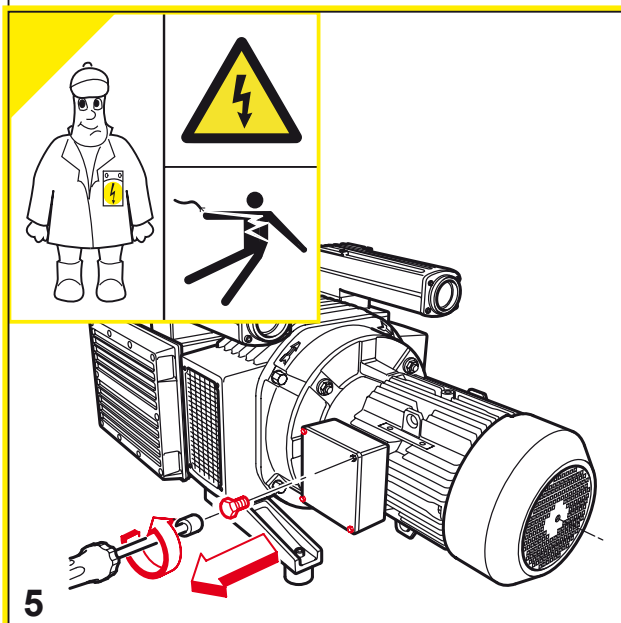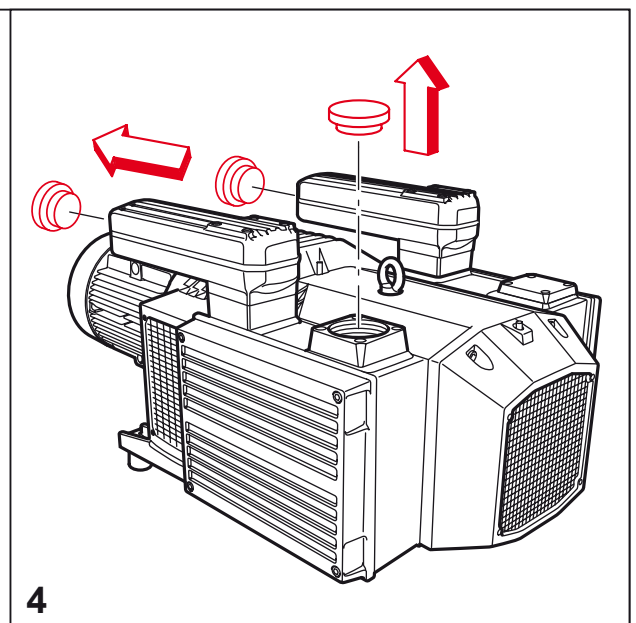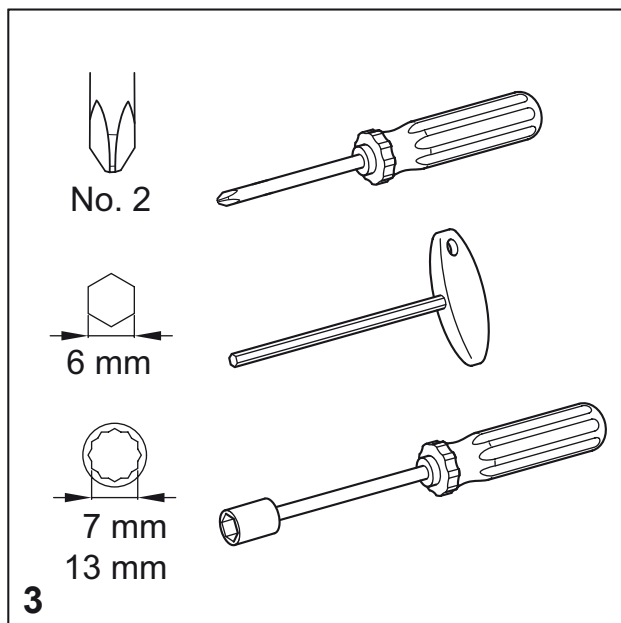


< 2m	$\phi 4''$		 VACUUM
2m...3m	$\phi 4''$ + 		
> 3m...10m	$\phi 5''$ + 		

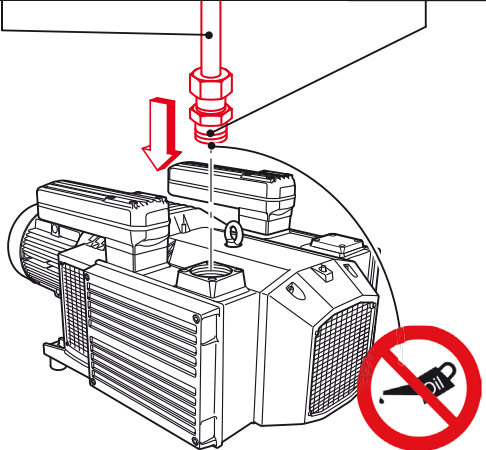


9




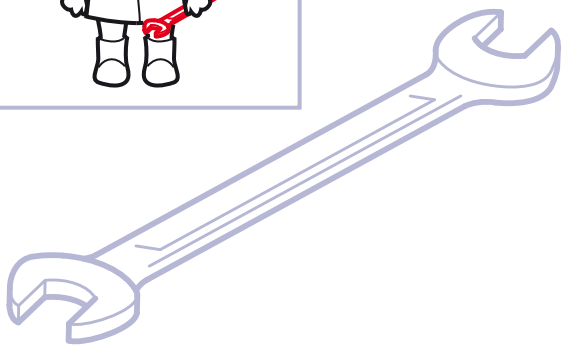


A.



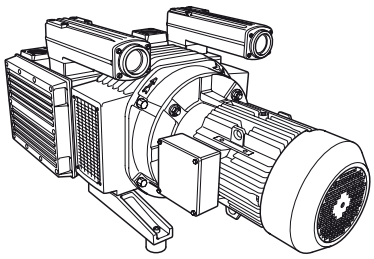







B.











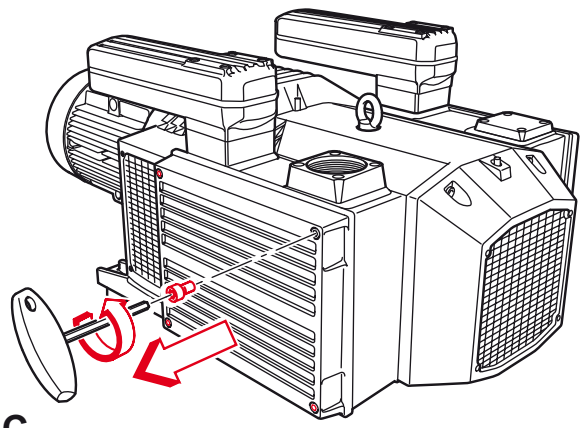

C.

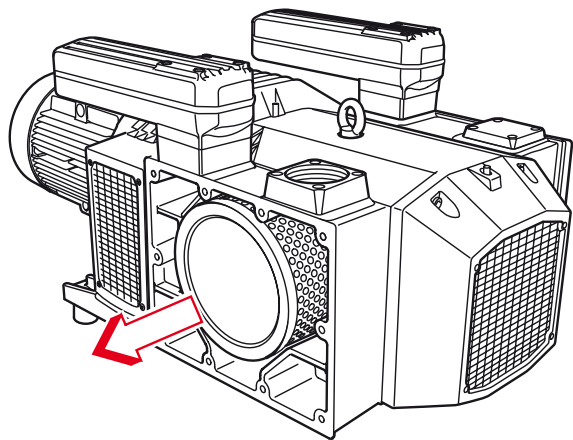






D.

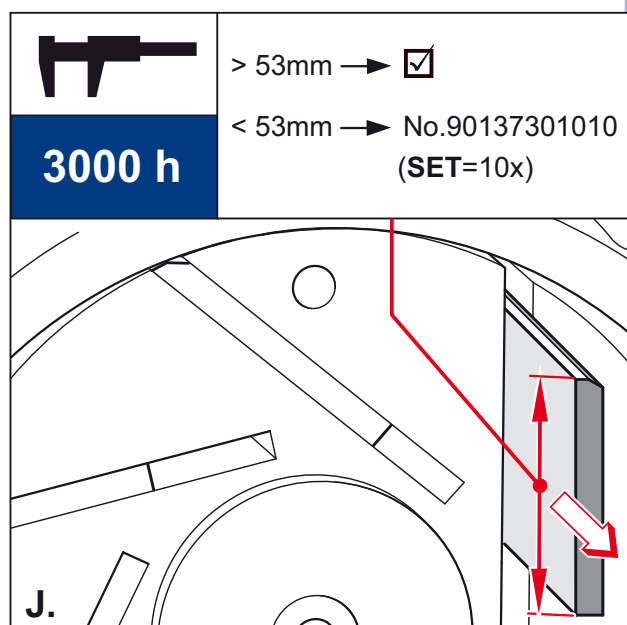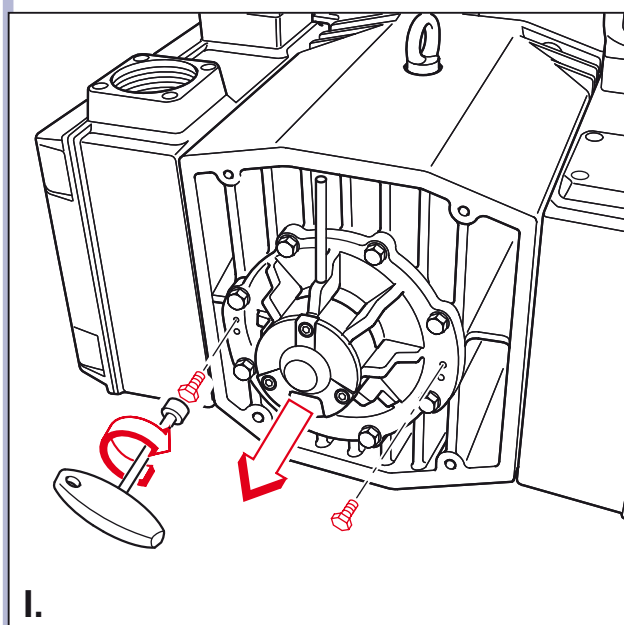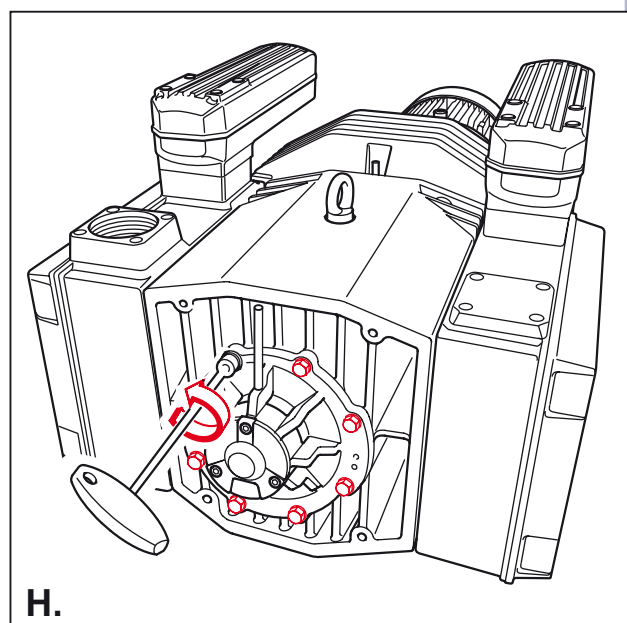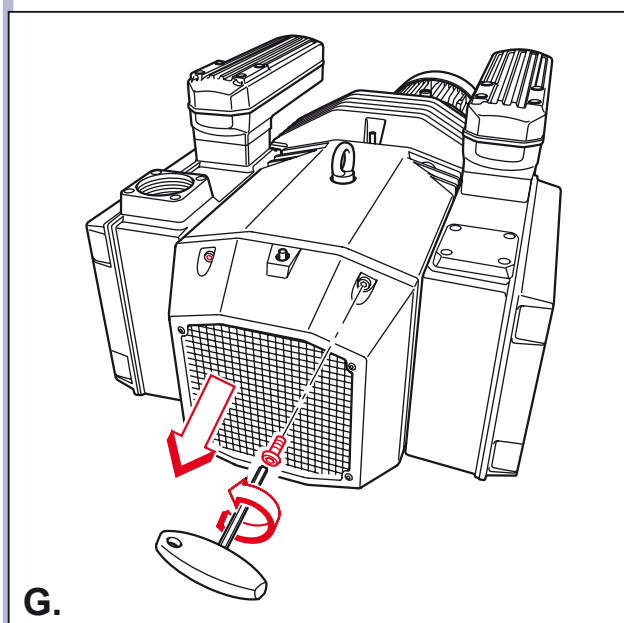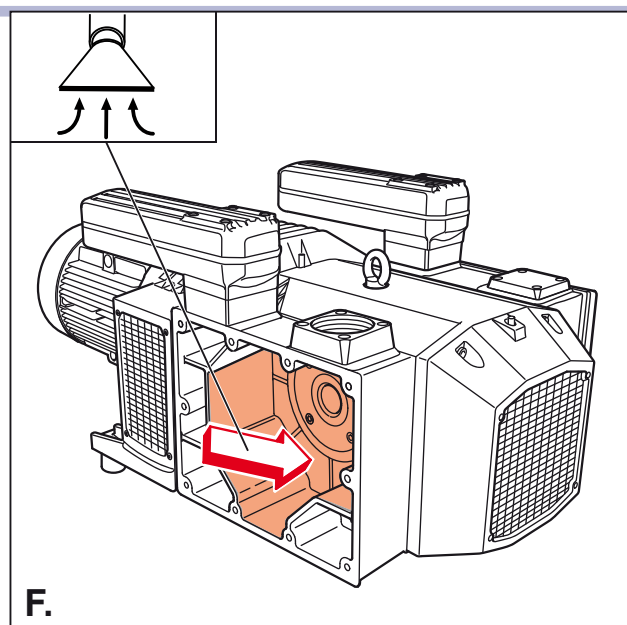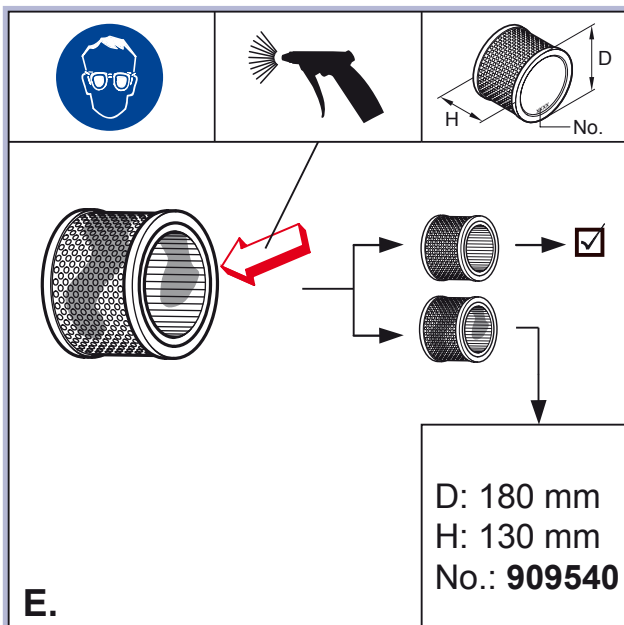

> 53mm → ☒

3000 h

< 53mm → No.90137301010
(SET=10x)

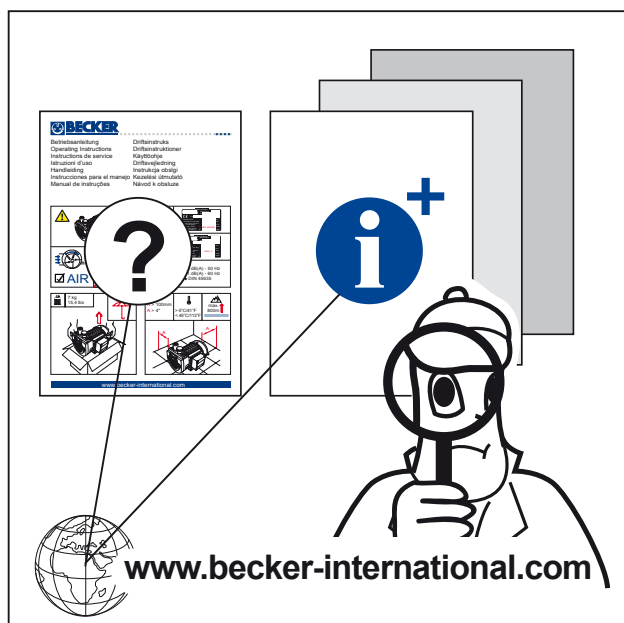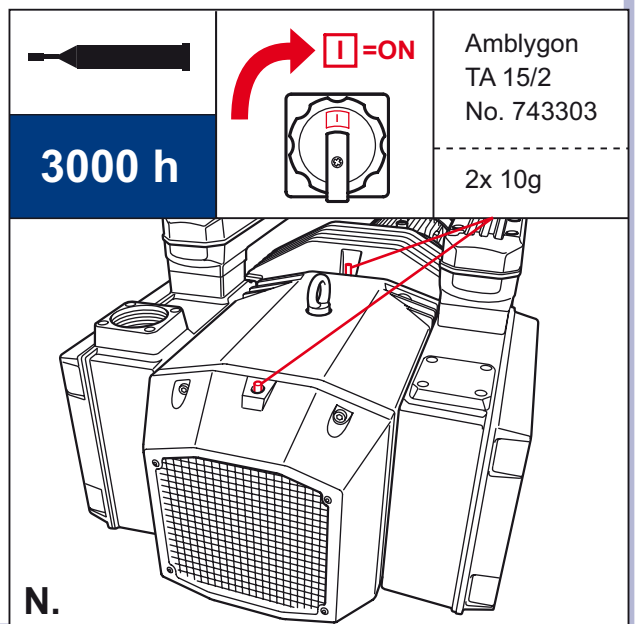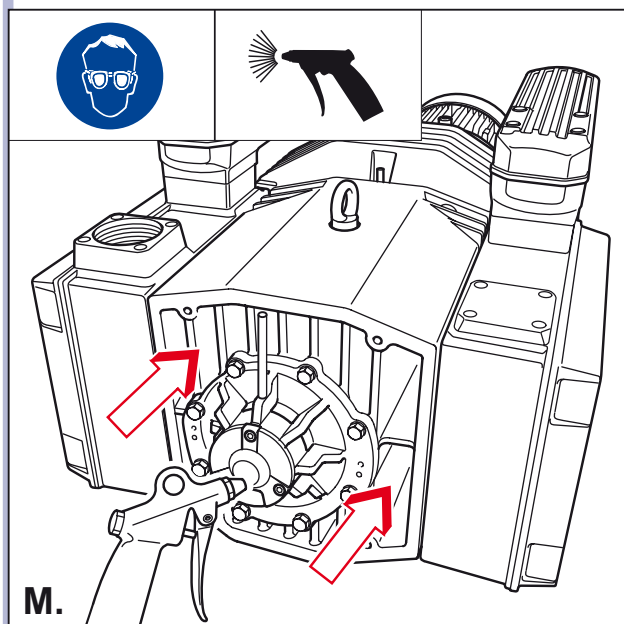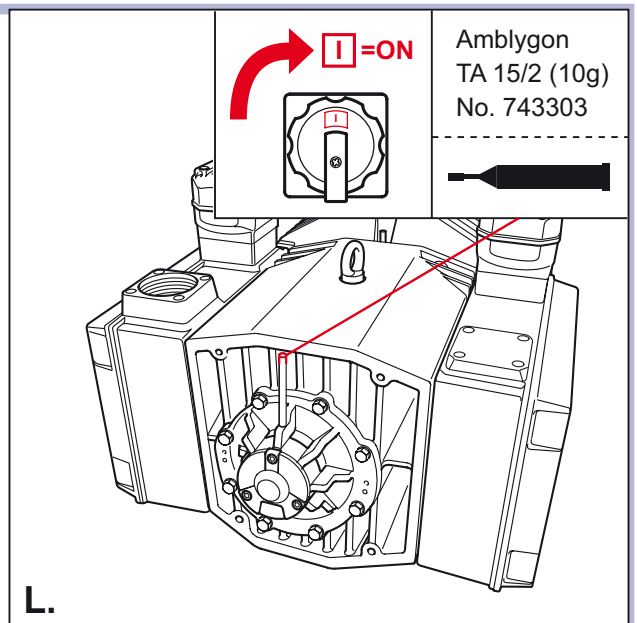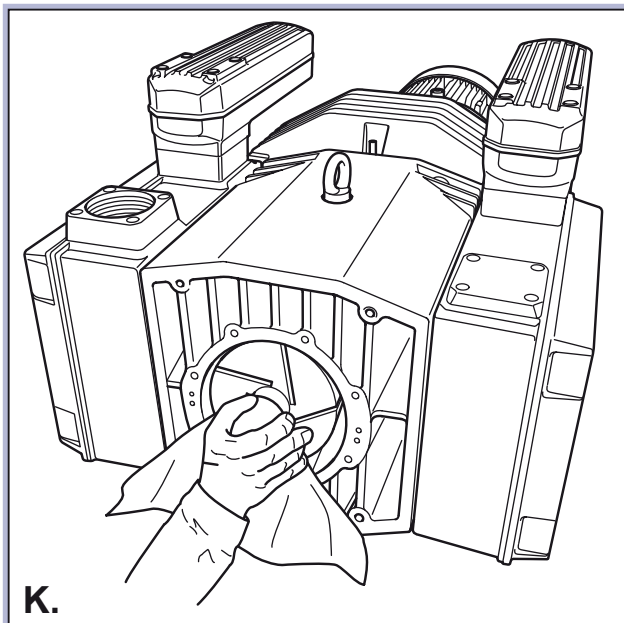

Gebr. Becker GmbH
Hölker Feld 29-31
D-42279 Wuppertal

info@becker-international.com

(D) Service:

Tel: +49 (0)202 697-171

Fax: +49 (0)202 64 44 74